

PRW-PB SERIES

PP can construction with resin top and flexible multistrand wire lead out for panel board application

Metallised Polypropylene (MPP) Capacitors are film Capacitors, made out of two Al-Zn metallised films with plastic film acting as dielectric. PRW-PB series MPP Capacitors are with resin top sealing, flexible multistrand copper wire lead out and encapsulated in PP can with black cap.

1. SPECIFICATIONS

Series	PRW-PB Series
Type	Metalized Polypropylene Capacitors for panel board application
Rated Voltage	440 Vac
Rated Frequency	50/60 Hz
Climatic Category	-25/85°C/21
Type	MPP-SH
Safety Protection	P0
Capacitance Range	55 to 72 μ F
Capacitance Tolerance	\pm 5%
Class of Operation	Class D


2. OTHER INFORMATION

Type of packing and Lead configuration	Bulk. Multistrand copper wire lead out.
Capacitor codification system	Refer section 6 for details
Dimensional specification	Refer section 4 for details
Marking specification	Refer section 7 for details

PRW-PB SERIES

PP can construction with resin top and flexible multistrand wire lead out for panel board application

3. PHYSICAL OUTLINE

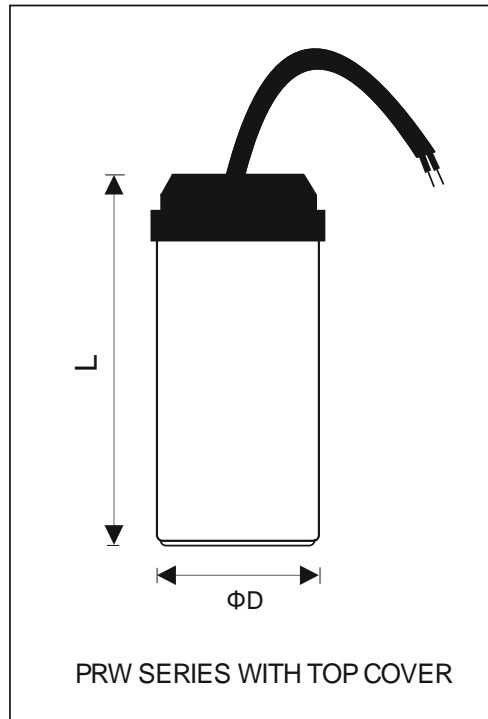

All Dimensions are in "mm"

4. DIMENSIONS (All units in mm)

Case Code	Diameter ØD±2 (mm)	Length L±3 (mm)
LS	45	110
NS	50	110

5. STANDARD RATING TABLE


Part Number	Rating (µF)	Diameter ØD±2 (mm)	Length L±3 (mm)	Case Code	Wire Length (mm)
PRW55R0GLSTC	55	45	110	LS	250±5
PRW60R0GLSTC	60	45	110	LS	250±5
PRW72R0GNSTC	72	50	110	NS	250±5

PRW-PB SERIES

PP can construction with resin top and flexible multistrand wire lead out for panel board application


6. CAPACITOR ORDERING INFORMATION

Capacitors are identified with the help of a 12-digit code. Expansion of part Nos are detailed below.

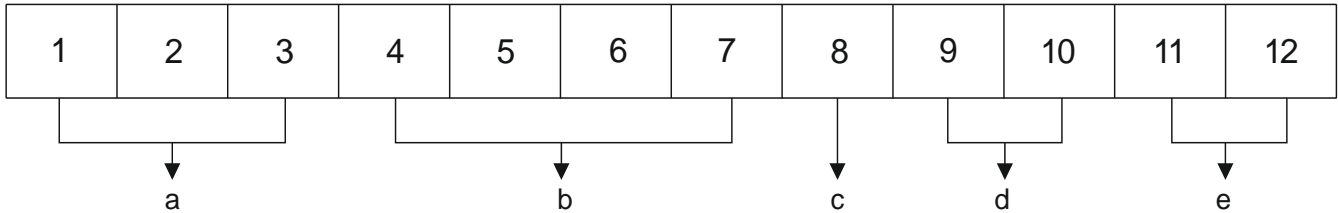

a	b	c	d	e
Series Code	Capacitance Value Code	Voltage Code	Case Code	Applications
PRW: PP can, Resin Top, Wire termination	Eg: (1) 60 μ F is coded as 60R0 (For the range of Capacitance refer rating table)	A - 110 V B - 230 V G - 440 V	Eg: NS - 50 x 110	PB - For Panel Board application

Eg: PRW Series 60 μ F/440VAC
With top cover

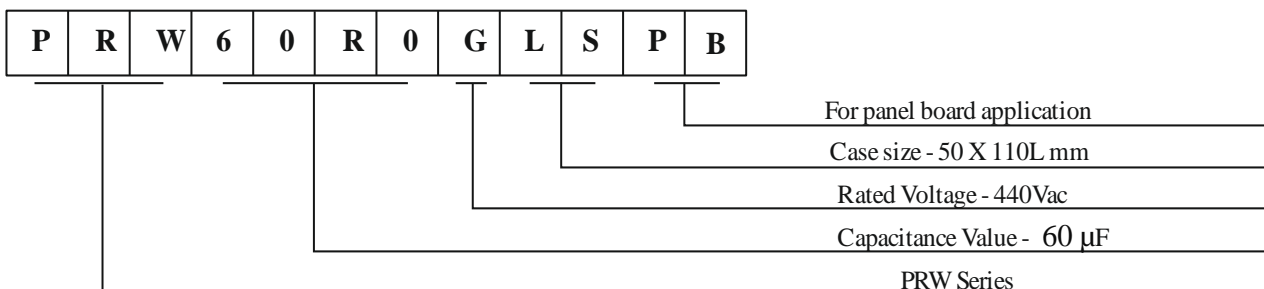


PRW-PB SERIES

PP can construction with resin top and flexible multistrand wire lead out for panel board application

7. MARKING ON THE CAPACITOR

For PRW-PB series MPP Capacitors product information is printed on the can in black letters.

The following information are marked on the Capacitor;

- | | |
|---|----------------------------|
| 1) Manufacturer's Name and Logo  | 2) Climatic Category |
| 3) Nominal capacitance value in μf | 4) Capacitance tolerance |
| 5) Rated voltage | 6) Rated frequency |
| 7) Self – healing (SH) | 8) Class of operation |
| 9) Safety protection | 10) Date code (Year-Month) |
| 11) Application | |

8. DATE CODE

Year Code:

Year	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009
Letter Code	M	N	P	R	S	T	U	V	W	X

Year	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019
Letter Code	M	N	P	R	S	T	U	V	W	X

Year code repeats after each cycle of 20 years

Month Code:

Month	Jan	Feb	Mar	Apr	May	June	July	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

PRW-PB SERIES

PP can construction with resin top and flexible multistrand wire lead out for panel board application

9. PACKING QUANTITY

MPP Capacitors are packed in a PRIMARY cardboard carton by incorporating suitable SEPERATORS to avoid damages during transit. The primary cartons are then placed in a MOTHER Cardboard carton before shipment.

Packing quantity per primary carton are detailed below;

Case Code	No.s/ Carton
LS	49
NS	36